



CM-C54T | CM-C56T

CEILING LOUDSPEAKER

Offering crystal-clear audio, a discreet embedded design, and a host of practical features, the CM-C54T and CM-C56T are ideal for installations at hotels, restaurants, bars, commercial spaces and other locations where superior sound and aesthetics are key.

KEY FEATURES

- 2 way coaxial speaker
- 16 Ω impedance
- Protective steel-back can
- One-touch spring-loaded ceiling mounting tab
- The slide-lock mechanism on the grille
- UL2043 / UL1480A compliant for United States and Canada
- Also compatible with XY Series
- Paintable grills

APPLICATIONS

Hotels, restaurants, bars, commercial spaces and other locations where superior sound and aesthetics are key.

SPECIFICATIONS

| | | CM-C54T-W | CM-C54T-K | CM-C56T-W | CM-C56T-K |
|--|-------|---|-----------|---------------------------------------|-----------|
| Frequency response (- 10 dB, Typical) | | 85 Hz ~ 20 kHz | | 82 Hz ~ 20 kHz | |
| Dispersion | | 120° | | 90° | |
| Sensitivity (1W / 1m) | | 86 dB | | 88 dB | |
| Nominal Impedance | | 16 Ω | | | |
| Power Handling (RMS/Program) | | 30 W / 60 W | | 60 W / 120 W | |
| Transformer taps | 70 V | 30 W / 15 W / 7.5 W / 3.7 W | | 60 W / 30 W / 15 W / 7.5 W | |
| | 100 V | 30 W / 15 W / 7.5 W | | 60 W / 30 W / 15 W | |
| Driver configuration | LF | 4-inch (102-mm) cone | | 6.5-inch (165-mm) cone | |
| | HF | 3/4-inch (20-mm) dome tweeter | | 3/4-inch (20-mm) dome tweeter | |
| Connector | | Euroblock (4 pin) x 1 (input: +/-, loop-thru: +/-) | | | |
| Color | | White | Black | White | Black |
| Dimensions (W x H) | | 240 x 210 mm (9.45 x 8.27 inches) | | 278 x 211 mm (10.94 x 8.31 inches) | |
| Weight (1 piece) | | 2.6 kg | | 3.5 kg | |
| Accessories | | C-ring Tile bridge 4-pin Euroblock connector Template for cutting the ceiling hole | | | |
| Packaging Type | | 2 pieces per package | | | |

Features and specifications of the products described or illustrated in this specification sheet are correct at the time of printing but could change as production changes might occur. This specification sheet may contain typographical errors and the colours of the depicted products may deviate slightly from reality. Consult your Pioneer dealer to ensure that actual features and specifications match your requirements. This specification sheet may contain references to products that may or will not be available in your country.


AlphaTheta EMEA Limited Artemis Building, Odyssey Business Park, West End Road, South Ruislip, HA4 6QE, UK
AlphaTheta Music Americas, Inc. 2050 W 190th Street, Suite #109, Torrance, CA 90504, USA
AlphaTheta Corporation 6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan




WWW.PIONEERPROAUDIO.COM

TECHNICAL DRAWING

CM-C54T

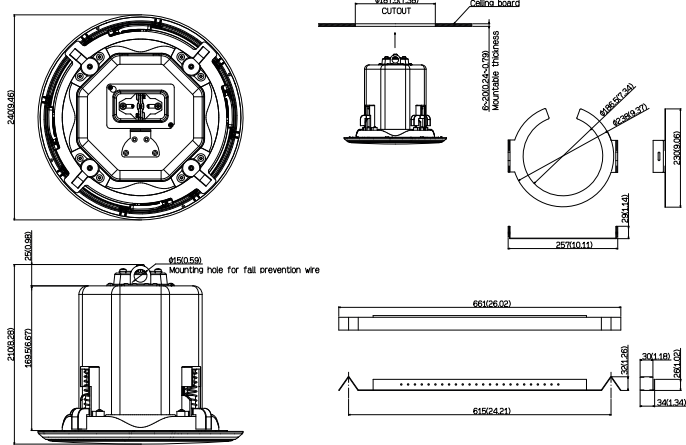

CM-C56T

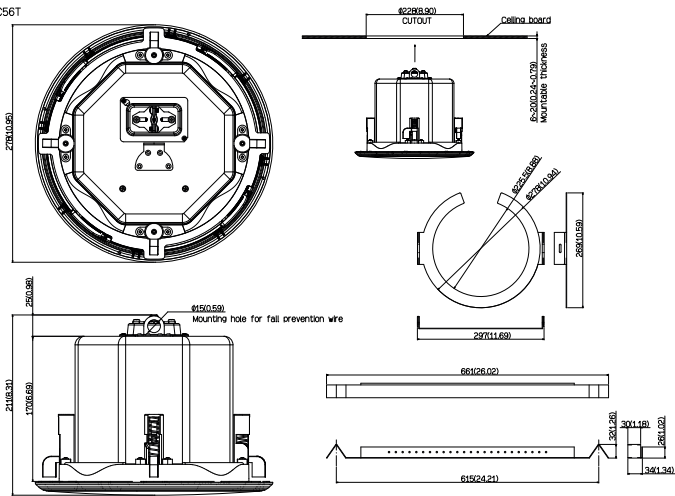


CM-C54T



CM-C56T



C-RING / TILE BRIDGE

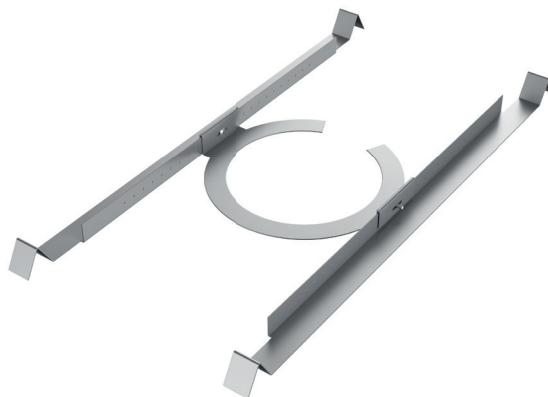

Features and specifications of the products described or illustrated in this specification sheet are correct at the time of printing but could change as production changes might occur. This specification sheet may contain typographical errors and the colours of the depicted products may deviate slightly from reality. Consult your Pioneer dealer to ensure that actual features and specifications match your requirements. This specification sheet may contain references to products that may or will not be available in your country.

AlphaTheta EMEA Limited, Artemis Building, Odyssey Business Park, West End Road, South Ruislip, HA4 6QE, UK
 AlphaTheta Music Americas, Inc. 2050 W 190th Street, Suite #109, Torrance, CA 90504, USA
 AlphaTheta Corporation 6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan



WWW.PIONEERPROAUDIO.COM